

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 4" +1.5" two ways speaker unit
- Power taps 2.5w-5w-10w-20w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket

Description

The T-774HW is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 4"+1.5" two ways speaker driver is designed of wide frequency response 120-18kHz, the multiple power taps 2.5W, 5W, 10W & 20W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

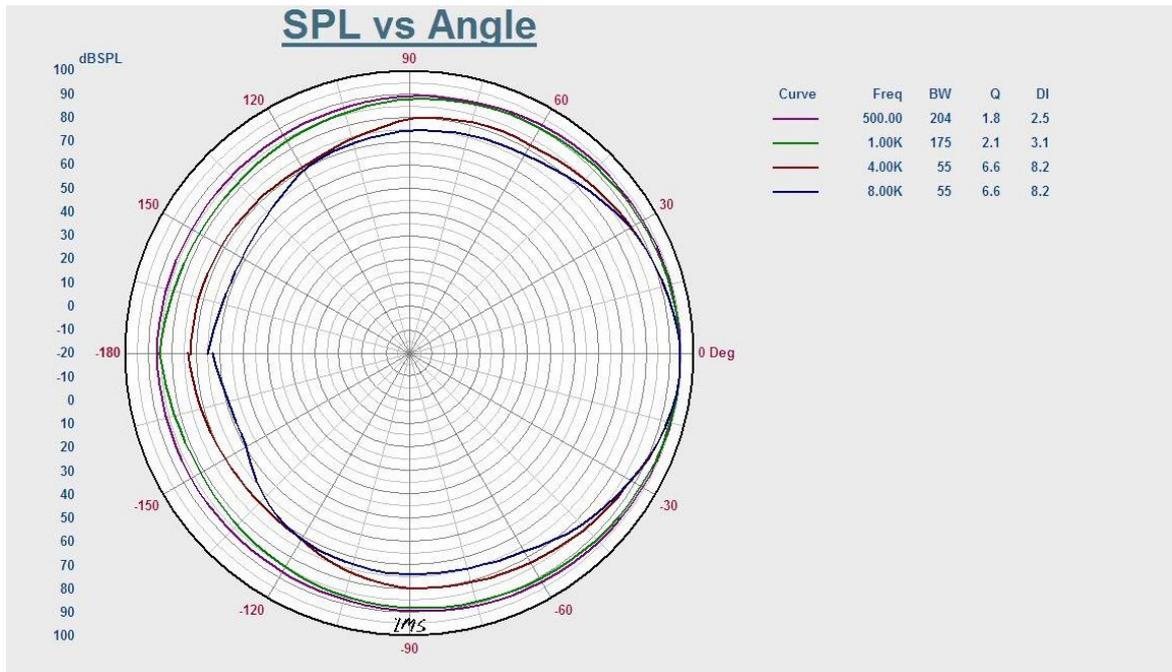

Specification

| Model | T-774HW | |
|----------------------------|--------------------------------------|----------------------------|
| Power Taps @100V | 2.5W, 5W, 10W, 20W | |
| Power Taps @70V | 1.25W, 2.5W, 5W, 10W, 20W | |
| Transformer Impedance | 4KΩ/2KΩ/1KΩ/500Ω/250Ω | |
| Input | 70V/100V/8Ω | |
| SPL(1W/1M) | 86dB | |
| Max. SPL (Rated W/1M) | 99dB | |
| Frequency Response (-10dB) | 120-18KHz | |
| Finish | Baffle: ABS, Black/White | Grille: Steel, Black/White |
| Speaker Driver | 4" x 1 | 1.5" x 1 |
| Dimensions | 276 x 170 x 170mm | |
| Weight | 2.3kg | |
| Mounting | With mounting bracket fixed by screw | |

Appearance:



Direction Diagram:



Frequency Response:

